

WO-M1-120USB-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

Bluetooth Smart Wall Socket

Bluetooth Mesh in SenseWave

The WO-M1-120USB-BT is a Bluetooth controlled smart wall socket, and also has a USB socket, can be used for mobile phone charging, APP can control the socket, very convenient, intelligent.

Mounting: Standard wall box



Bluetooth®

Download on the
App Store



google play



FEATURES & SPECIFICATIONS

Basic Features

- Bluetooth® SIG mesh
- Mounts in any standard wall box
- Color: white
- Technology Partner SenseWave
- Operating temperature:-10° to 55°C
- Storage Temperature: -10° to 60°C
- Relative Humidity:
90-95% non-condensing at 30°C
- 5-years limited warranty

Summary

- Product Type: Bluetooth Smart Wall Socket
- Input Voltage:15A 125VAC 60Hz
- Socket outlet Output:
Max.15A 125VAC 60Hz Resistive
- USB Output:5VDC Max.2.1A
- Wireless Frequency:2.4GHz
- Wireless Standard:IEEE802.11 b/g/n
- Mounting: Standard wall box
- Max Bluetooth Range: 65'(20m)

Listings


- FCC
- ETL
- DLC
- Bluetooth®

Note:

1. Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for range accuracy.




PRODUCT OUTLINE

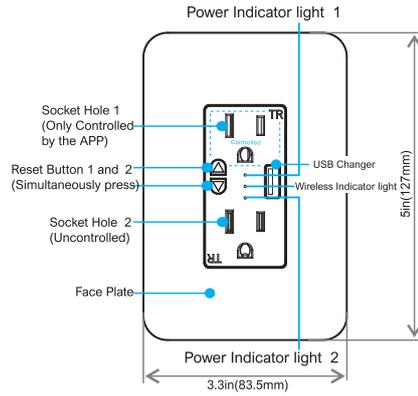

RESET


Press and hold Switch button "up" and "down" for 5s to reset the switch and get into quick configure mode.

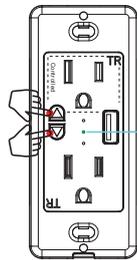

Indicator light rapidly blinks (2 times per second)
Step.1. Make sure the indicator blinks rapidly, If not, hold the "up" and "down" button for 7 -10 seconds for reset.

DIMENSIONS AND APPEARANCE

Unit:mm

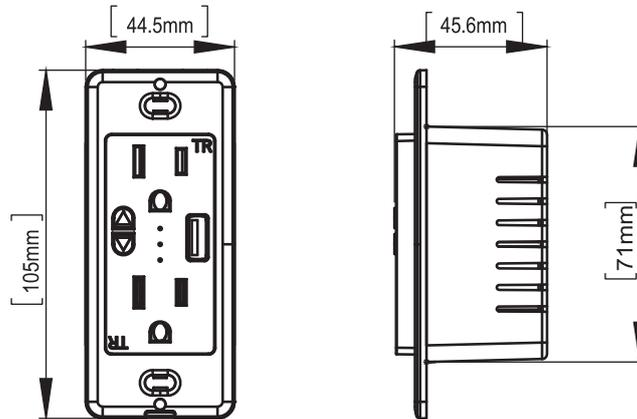

WIRING DIAGRAM

