

PB-L6-120277D-2B-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

Bluetooth Dimmer Wall Switch

Bluetooth Mesh in SenseWave

The bluetooth dimmer wall switch is designed to replace your existing wall switch and add enhanced lighting control. This wall switch has one sliding block for direct control of your SenseWave connected devices to change Brightness easily.

Mounting: Standard wall box



Bluetooth®



TECHNICAL SPECIFICATIONS

Action: Bluetooth Dimmer Wall Switch

Actuations: Rated for 50,000 actuations

Power: 120-277VAC ,60Hz

Max Fixtures Per Control: 100

Interoperability: SenseWave Sensors and Gateways

Operating Temp.: 32 to 122 F/0° to 50°C

Enclosure: Recyclable PC

Wireless Standards: IEEE 802.15.4


Radio Frequency: 2400-2483.5 MHz

Wireless Range: 60 ft. (18 m) radius open range

Encryption: AES-128



PRODUCT OUTLINE

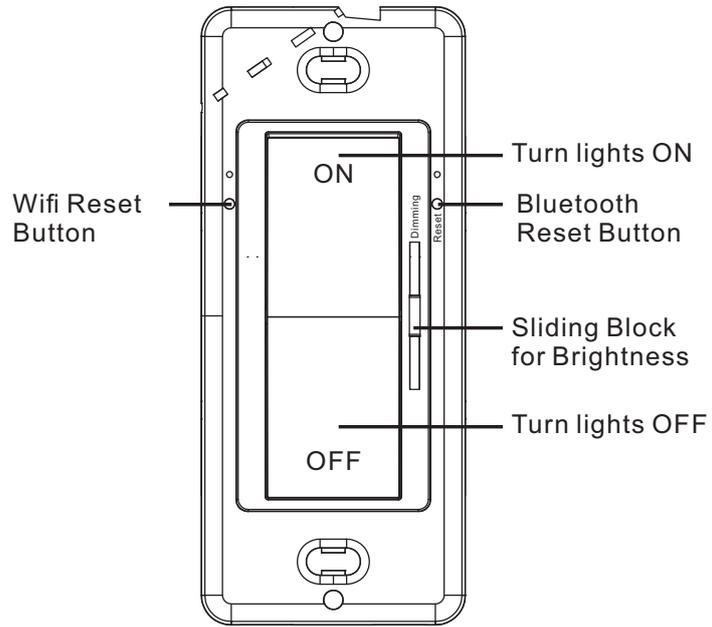

DIMENSIONS AND APPEARANCE

Unit:mm

