

QC-P6-P-1024D-PC-DALI



## 10-14V 0-10V Fixture-Integrated

### Bluetooth PIR Sensor

The QC-P6-P-1024D-PC-DALI uses PIR motion detector architecture and bluetooth to DALI technology for improved detection coverage applications. Powered by DALI BUS,extremely ease of use with DALI system,especially with D4i driver. Bluetooth to DALI signal PIR sensor controller,Bluetooth® mesh network.All devices on DALI line are broadcast controlled by mobile application.



Bluetooth®




## TECHNICAL DATA

|                          |                         |
|--------------------------|-------------------------|
| Motion Sensor            | Passive infrared sensor |
| Input Power              | D4i DALI                |
| Input Signal             | Bluetooth               |
| DALI Consumption Current | Max. 30mA               |
| Control Dimming Curve    | Logarithmic             |
| Control Dimming Method   | PWM                     |
| Mounting height          | 12ft Max.               |
| Detection angle          | 360°                    |
| Operating temperature    | -20°C-60°C              |
| Max Bluetooth Range      | 100ft(30m)              |
| Warranty                 | 5years                  |




## SENSOR COVERAGE

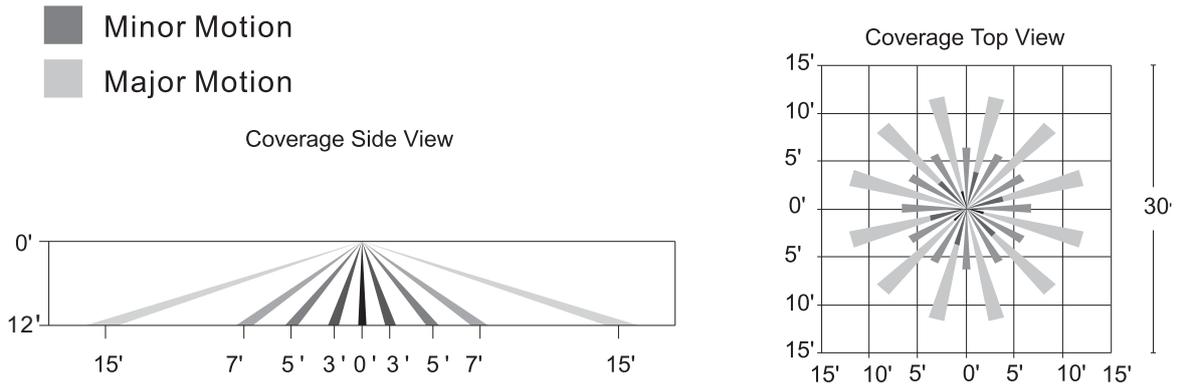


## DIMENSIONS AND APPEARANCE

Unit:mm

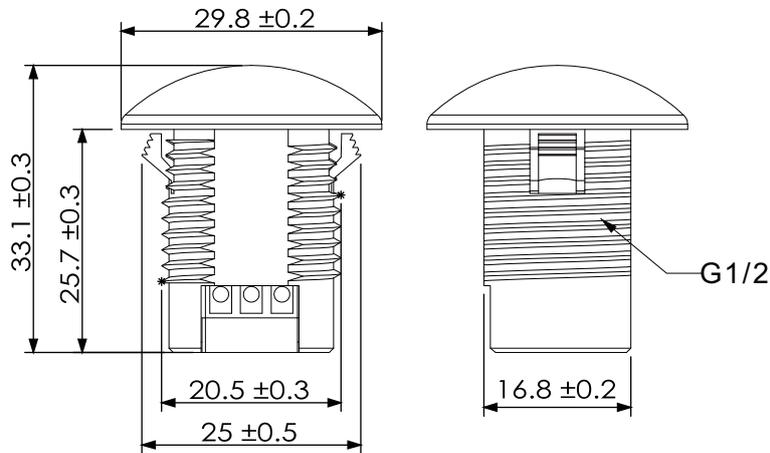

## WIRING DIAGRAM

Working with DALI D4i Driver (Integrated DALI BUS power supply)

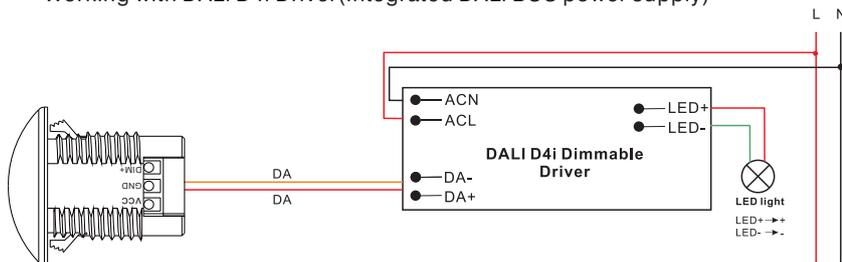

Working with DALI System (DALI BUS power supply)

