

PB-L9-1P-120DT-3B-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

120VAC Wireless 2-Button Dimmer Wall Switch

Bluetooth Mesh in SenseWave

PB-L9-1P-120DT-3B-BT Bluetooth mesh dimmers provide automatic lighting control for a variety of indoor applications. They can replace any standard single-pole wall switch. 2-Button can be used for On/Off, and dimming controls. The configurations of each button can be personalized at the end.

Mounting: Standard wall box



Bluetooth®



FEATURES & SPECIFICATIONS

Basic Features

- Bluetooth® SIG mesh
- Manual on/off (wireless)
- Dim up/down (wireless)
- LED status indicator light
- Mounts in any standard wall box
- Color: white
- Technology Partner GEBC

Summary

- Product Type: Dimmer Wall Switch
- Input Voltage | Power Consumption: 120VAC , 60Hz | Max 1.0W
- Mounting: Standard wall box
- Max Bluetooth Range: 100ft(30m)

- Operating temperature: 0° to 55°C
- Storage Temperature: -10° to 60°C
- Relative Humidity: 90-95% non-condensing at 30°C
- 5-years limited warranty

Listings


- FCC
- ETL
- DLC
- Bluetooth®
- Declaration ID: D062134

Note:

1. Bluetooth Range is highly dependent on the integration of fixtures, surrounding environment and conditions. It is recommended to conduct testing for range accuracy.




PRODUCT OUTLINE

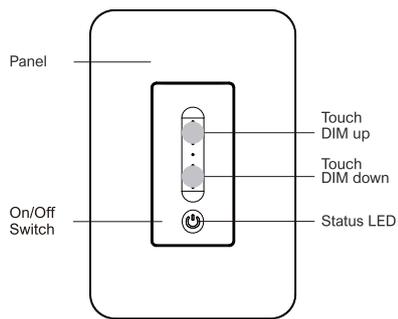


RESET

Press and hold Switch button and "DIM up" for 5s to reset the Dimmer and get into quick configure mode.

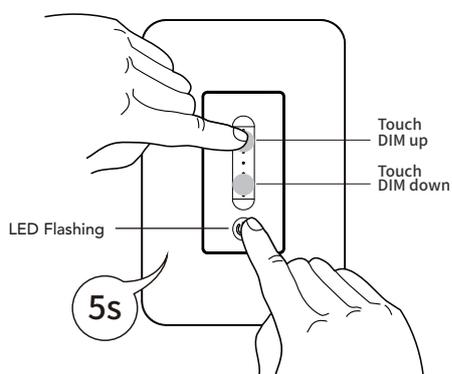

DIMENSIONS AND APPEARANCE

Unit:mm

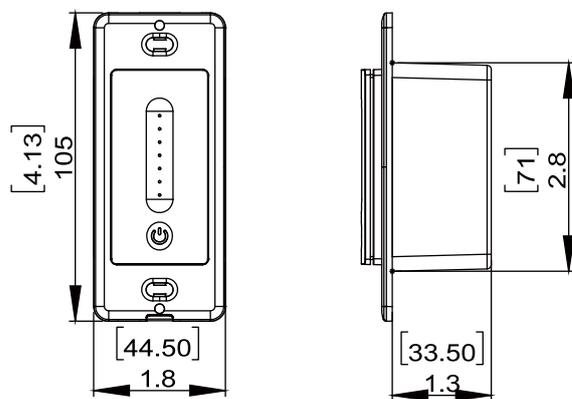

WIRING DIAGRAM

