

AJ-H1-P-1224D-PC-HLB-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V Side Mounted Plug and Play Motion Sensor Bluetooth PIR Sensor



Bluetooth®

AJ-H1-P-1224D-PC-HLB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay, and low bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Audio jack design, low voltage connector, match with SS-AJ-35-SMN.

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12V-24V DC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	L7 Lens(low bay) 13ft(4m) Max / L8 Lens(high bay) 40ft(12m)
Detection angle	360°
Operating temperature	-20°C~60°C
Max Bluetooth Range	200ft(60m)
Warranty	5years
IP rating	65




SENSOR COVERAGE

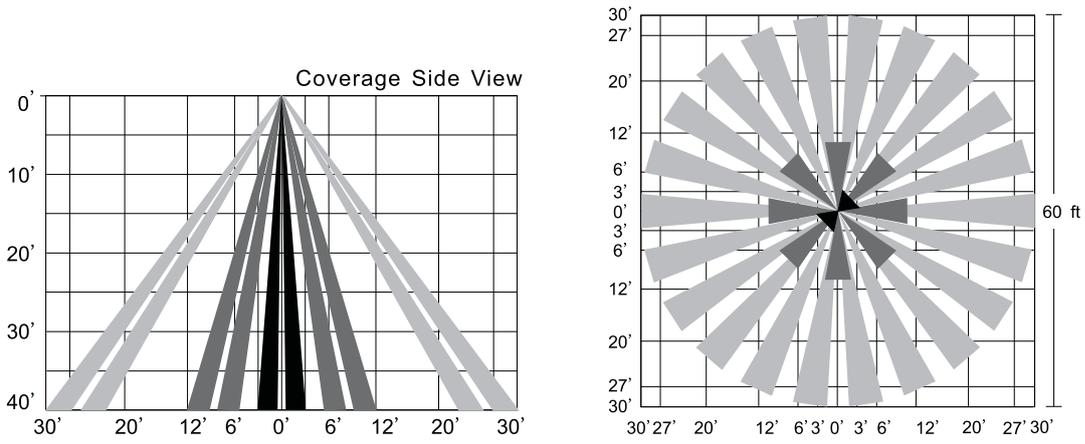


DIMENSIONS AND APPEARANCE

Unit:mm


AJ-H1-P-1224D-PC-HLB-65-BT

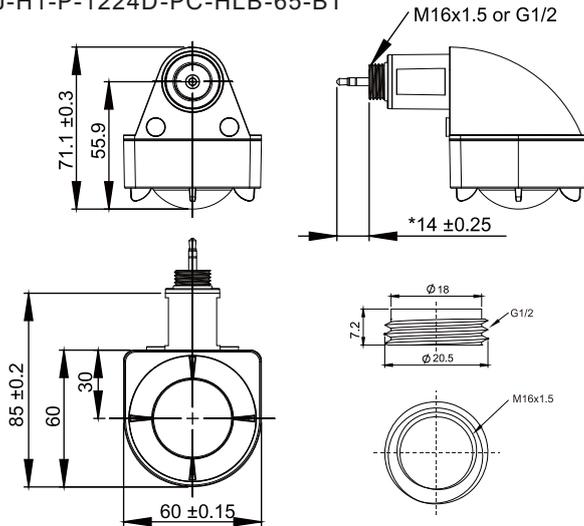


SS-AJ-35-SM

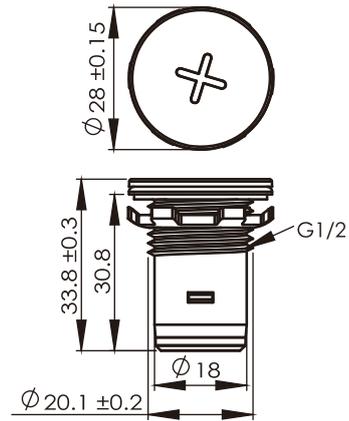

WIRING DIAGRAM

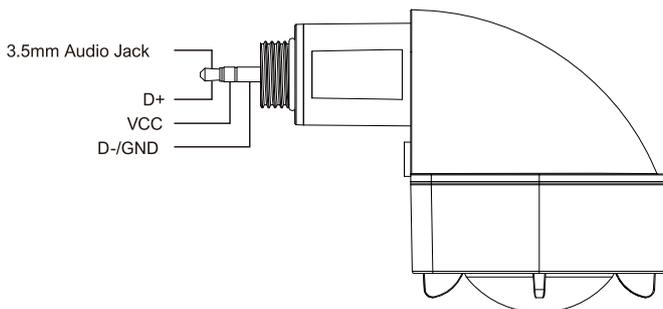

AJ-H1-P-1224D-PC-HLB-65-BT

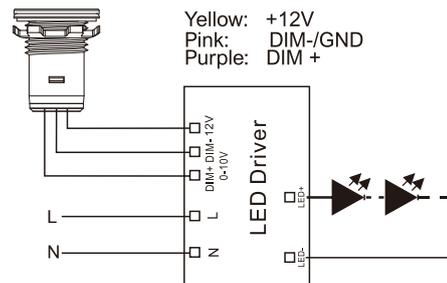

SS-AJ-35-SM