

3P-K1-MW-1224D-PC-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC 3PIN Receptacle Bluetooth Microwave Sensor



Bluetooth®

3P-K1-MW-1224D-PC-65-BT uses microwave motion detector architecture technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

3PIN design, low voltage connector, match with Sharkward SS-3P-65-R.

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C ~ +70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years




SENSOR COVERAGE

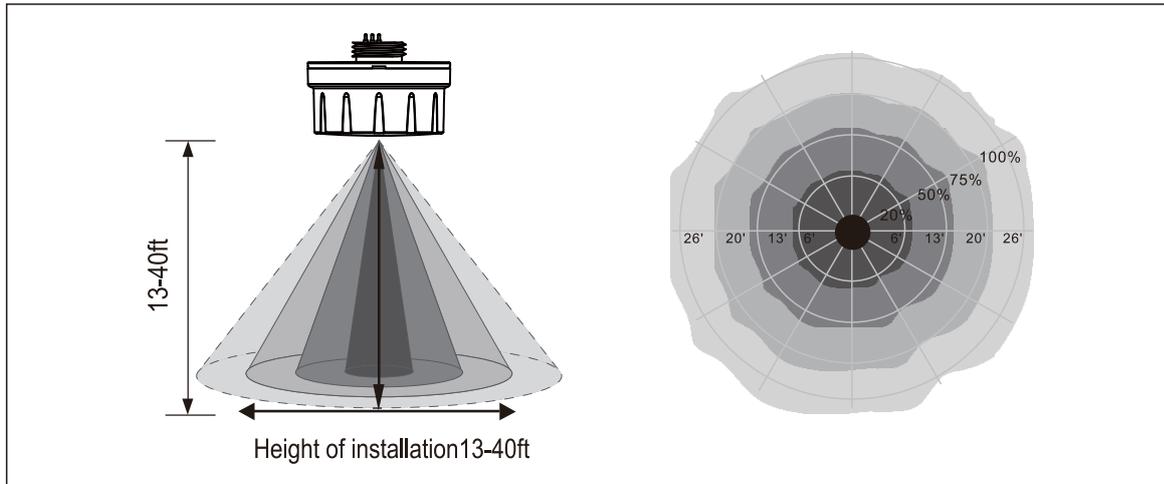

DIMENSIONS AND APPEARANCE

Unit:mm

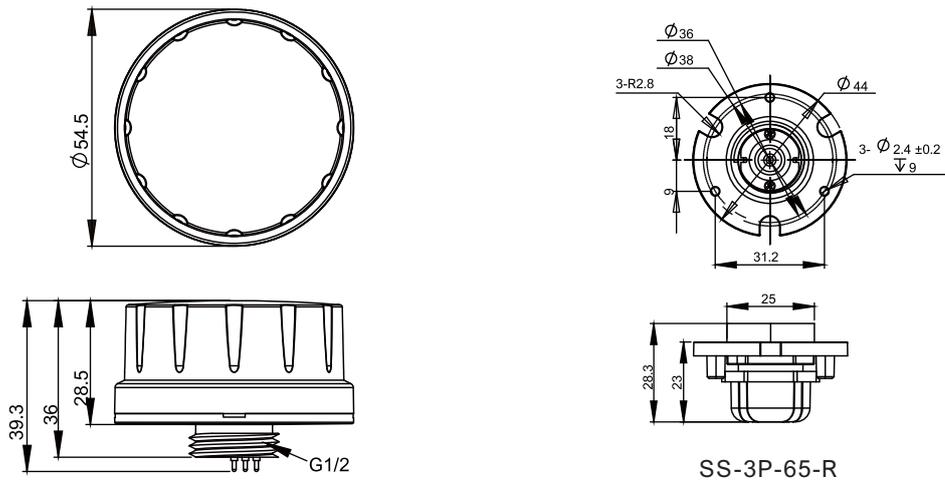

WIRING DIAGRAM

