

AJ-H3-P-1224D-PC-HLB-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V Plug and Play Motion Sensor with Magnets Bluetooth PIR Sensor



Bluetooth®

AJ-H3-P-1224D-PC-HLB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay, and low bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app. Audio jack design, low voltage connector, match with SS-AJ-35-SRSBN.

Download on the
App Store



google play



ANT-703P-B



L7 (Low bay)




L8 (High bay)

TECHNICAL DATA

| | |
|-----------------------|--|
| Motion Sensor | Passive infrared sensor |
| Input Power | 12V-24V DC, >50mA |
| Control Output | 0-10V, max 25mA sinking current |
| Mounting height | L7 Lens(low bay) 13ft(4m) Max / L8 Lens(high bay) 40ft(12m) |
| Detection angle | 360° |
| Operating temperature | -20°C~60°C |
| Max Bluetooth Range | 200ft(60m) |
| Warranty | 5years |
| IP rating | 65 |




SENSOR COVERAGE

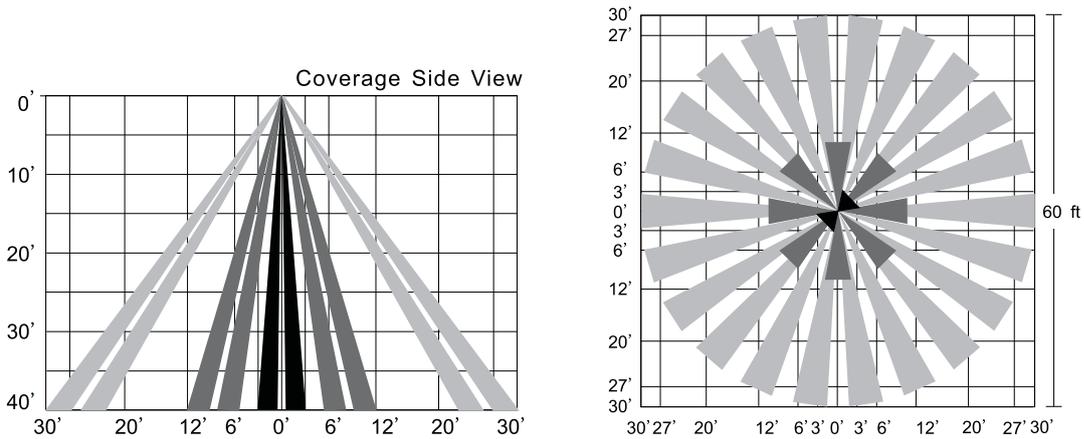

DIMENSIONS AND APPEARANCE

Unit:mm

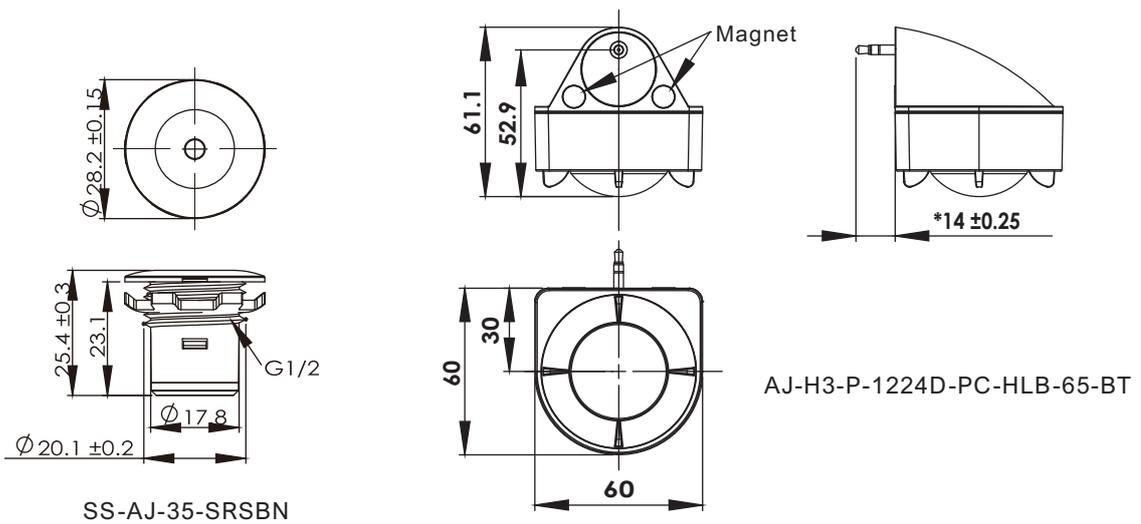

WIRING DIAGRAM

