

3P-K4-P-1224D-PC-HB50-65-BT



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 12-24V 0-10V DC Bi-level 3PIN Receptacle

### Bluetooth PIR Sensor



Bluetooth®

The 3P-K4-P-1224D-PC-HB50-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications. It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

3PIN design, low voltage connector, match with SS-3P-65-KO-SW.





## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	50ft(15m)Max.
Detection angle	360°
Operating temperature	-20°C~60°C
IP rating	65
Max Bluetooth Range	200ft
Warranty	5years





## SENSOR COVERAGE

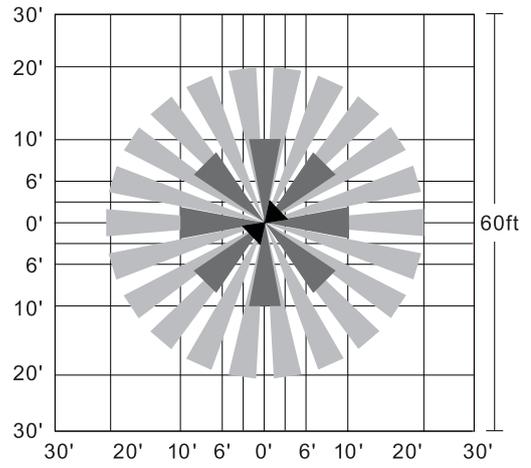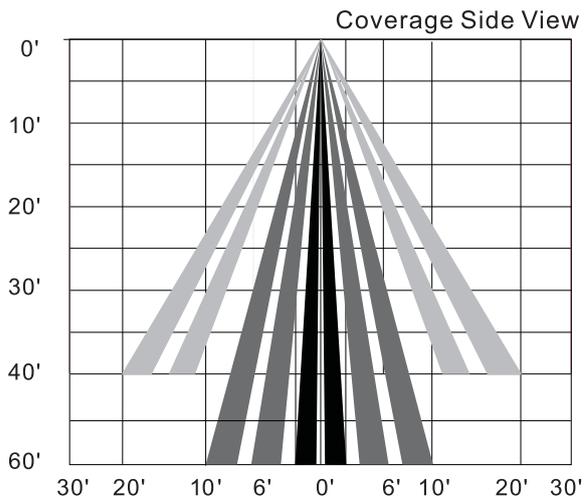

## DIMENSIONS AND APPEARANCE

Unit:mm

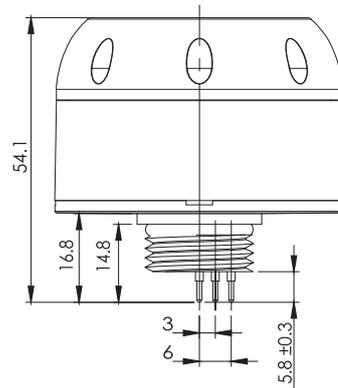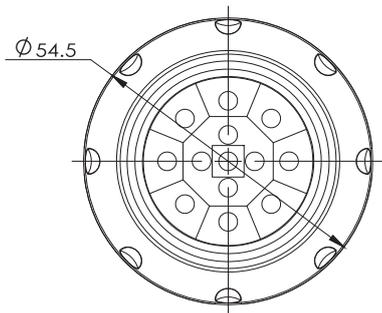

## WIRING DIAGRAM

