

AJ-H7-P-1224D-PC-HB-65-BT

FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 12-24V 0-10V DC Plug and Play Bluetooth PIR Sensor



Bluetooth®

**AJ-H7-P-1224D-PC-HB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications.**

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Plug in & play design, low voltage connector, match with audio jack SS-AJ-65-35-R.

Download on the  
App Store



google play




## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years







## SENSOR COVERAGE

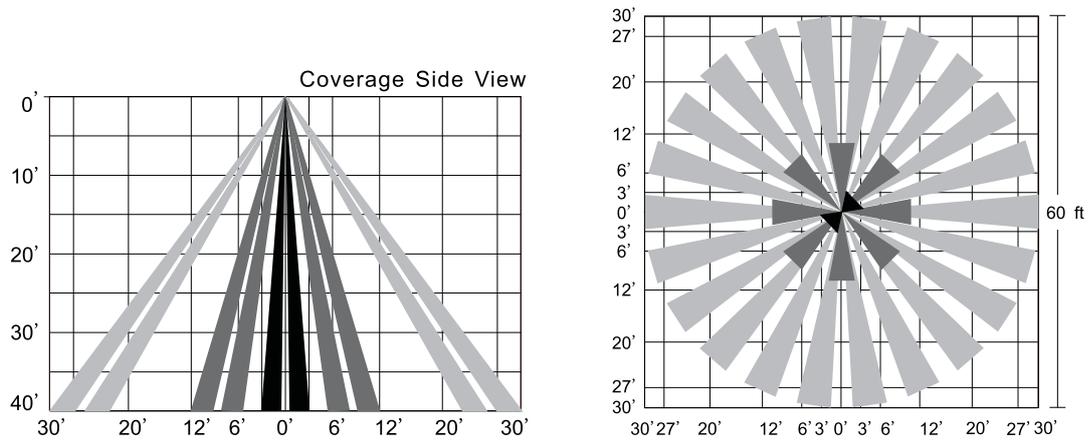

## DIMENSIONS AND APPEARANCE

Unit:mm

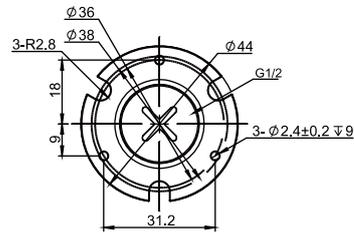

AJ-H7-P-1224D-PC-HB-65-BT(sensor)

SS-AJ-65-35-R

## WIRING DIAGRAM

