

3P-K6-P-1224D-PC-HB-65-BT

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC Bi-level 3PIN Receptacle Bluetooth PIR Sensor



Bluetooth®

3P-K6-P-1224D-PC-HB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications. It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

3PIN design, low voltage connector, match with Sharkward SS-3P-65-KO-SW.




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years




SENSOR COVERAGE

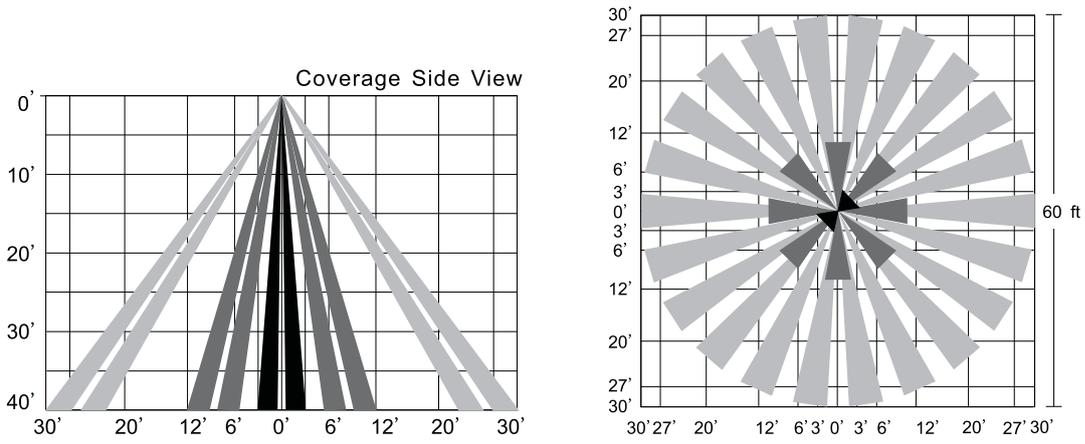

DIMENSIONS AND APPEARANCE

Unit:mm

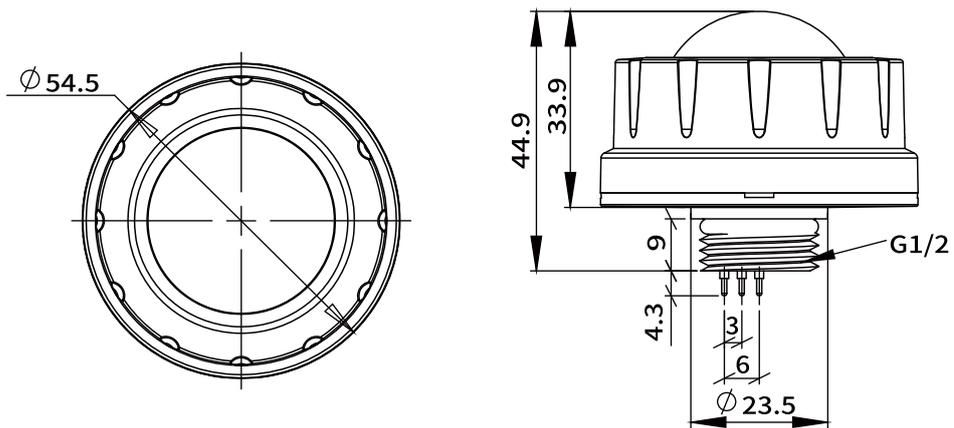

WIRING DIAGRAM

