

Z10-J2-P-1224D-PC-  
HB50-65-BT



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 12-24V 0-10V Fixture-Integrated Bluetooth PIR Sensor



Bluetooth®

The Z10-J2-P-1224D-PC-HB50-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications. It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Plug in & play design, low voltage connector, match with Zhaga Book 18 base and SS-Z10-KO-SW base.

Download on the  
App Store



google play




## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	50ft(15m)Max.
Detection angle	360°
Operating temperature	-20°C~60°C
IP rating	65
Max Bluetooth Range	200ft
Warranty	5years




## SENSOR COVERAGE

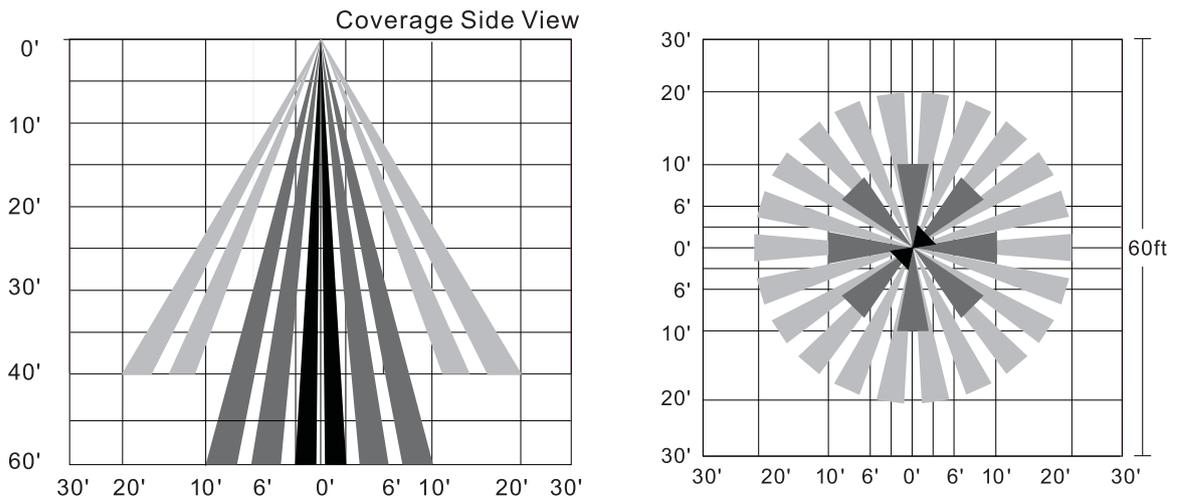

## DIMENSIONS AND APPEARANCE

Unit:mm

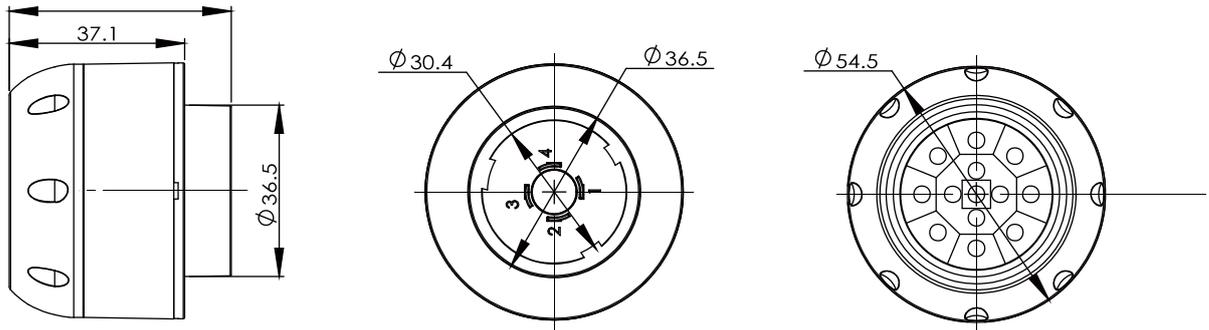

## WIRING DIAGRAM

- Port 1: 12-24VDC
- Port 2: DIM-/GND
- Port 3: DIM +
- Port 4: DIM+

