

QC-P7-P-1014D-PC-HB-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

10-14V 0-10V Fixture-Integrated Bluetooth PIR Sensor



Bluetooth®

QC-P7-P-1014D-PC-HB-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft (12m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
Max Bluetooth Range	200ft (60m)
Warranty	5 years




SENSOR COVERAGE

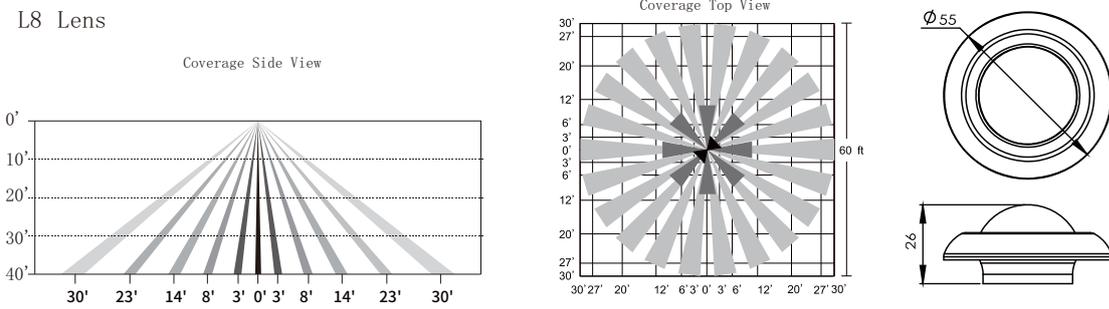

DIMENSIONS AND APPEARANCE

Unit:mm

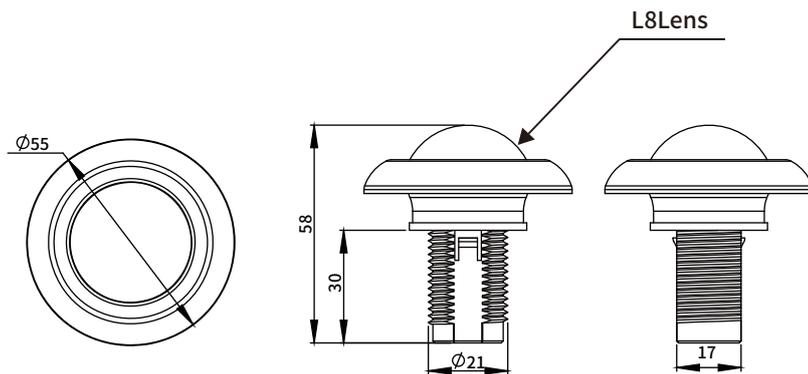

(Punch-out diameter 21.5-22mm)

WIRING DIAGRAM

