


Z18-G1-MW-1224D-PC-HB-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC ZHAGA BOOK 18

Bluetooth Microwave Sensor

Z18-G1-MW-1224D-PC-HB-65-BT uses microwave motion detector architecture technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

ZHAGA BOOK 18 appearance design, low voltage connector, match with ZHAGA BOOK 18 BASE SS-Z18-KO-SW.



Bluetooth®

Download on the App Store



google play




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C ~ +70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years




SENSOR COVERAGE

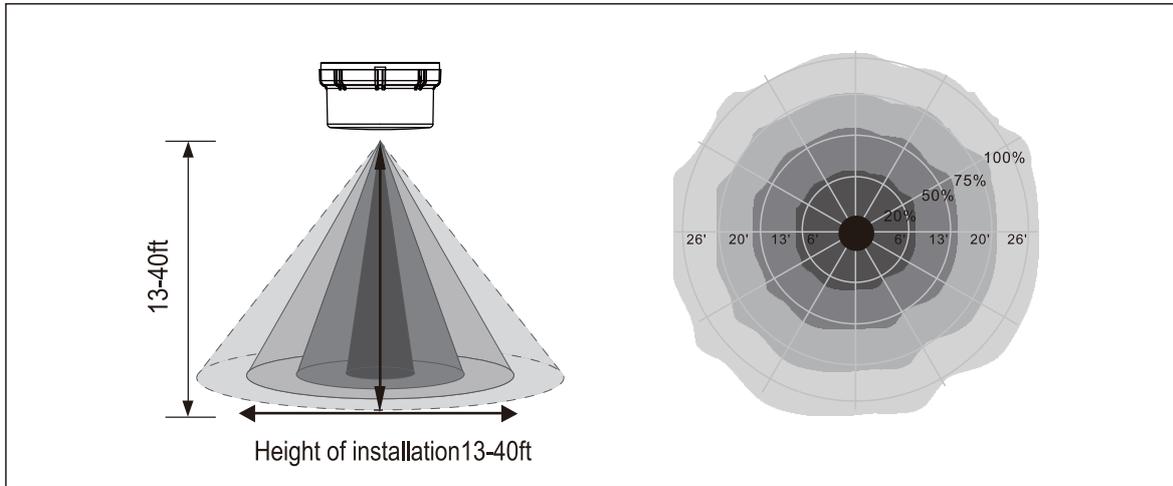

DIMENSIONS AND APPEARANCE

Unit:mm

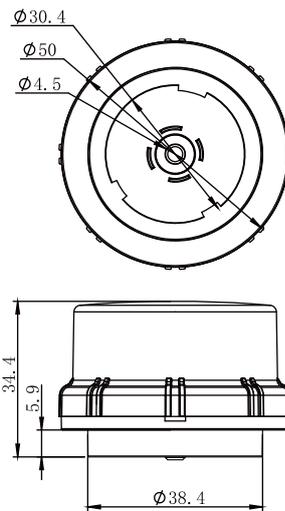

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

