

Z18-G3-P-1224D-PC-HB-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V Fixture-Integrated ZHAGA BOOK 18

Bluetooth PIR Sensor



Bluetooth®

Z18-G3-P-1224D-PC-HB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Plug in & play design, low voltage connector, match with ZHAGA BOOK 18 BASE SS-Z18-KO-SW.

Download on the
App Store



google play




TECHNICAL DATA

| | |
|-----------------------|---------------------------------|
| Motion Sensor | Passive infrared sensor |
| Input Power | 12-24VDC, >50mA |
| Control Output | 0-10V, max 25mA sinking current |
| Mounting height | 40ft(12m) Max. |
| Detection angle | 360° |
| Operating temperature | -20°C-60°C |
| IP rating | 65 |
| Max Bluetooth Range | 200ft(60m) |
| Warranty | 5years |





SENSOR COVERAGE

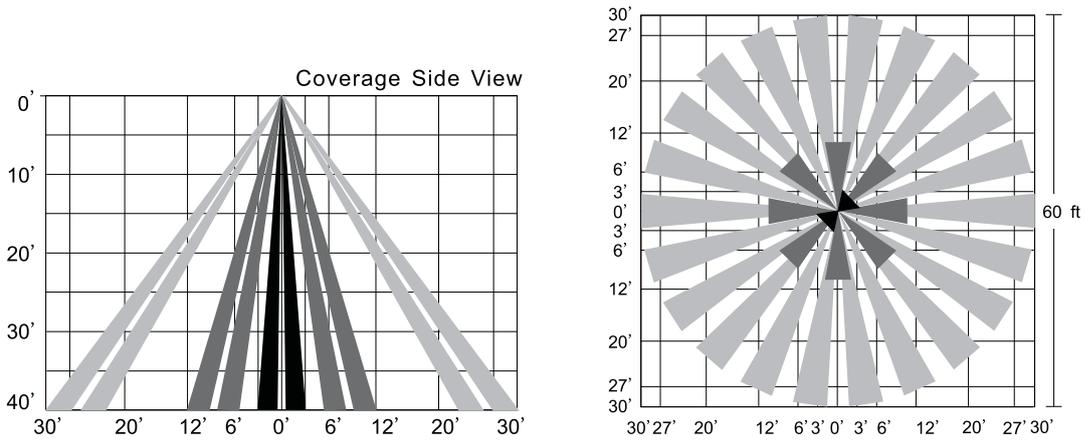

DIMENSIONS AND APPEARANCE

Unit:mm

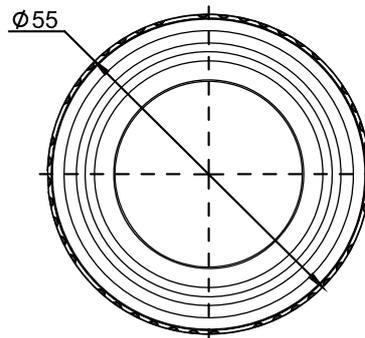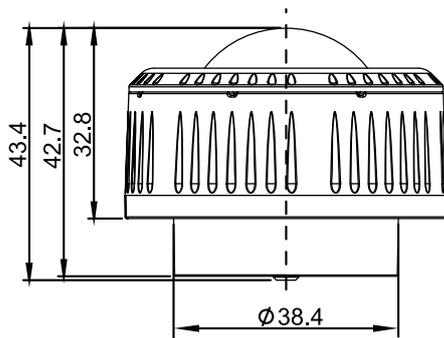

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

