


Z10-O1-MW-1224D-PC-
HB-65-BT

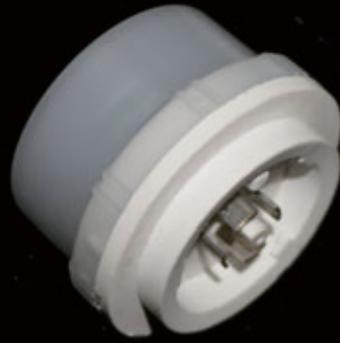

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC Z10 Receptacle

Bluetooth Microwave Sensor



Bluetooth®

Z10-O1-MW-1224D-PC-HB-65-BT uses microwave motion detector architecture technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Z10 design, low voltage connector, match with all Z10 base SS-Z10-KO-SW.




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C ~ +70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years




SENSOR COVERAGE

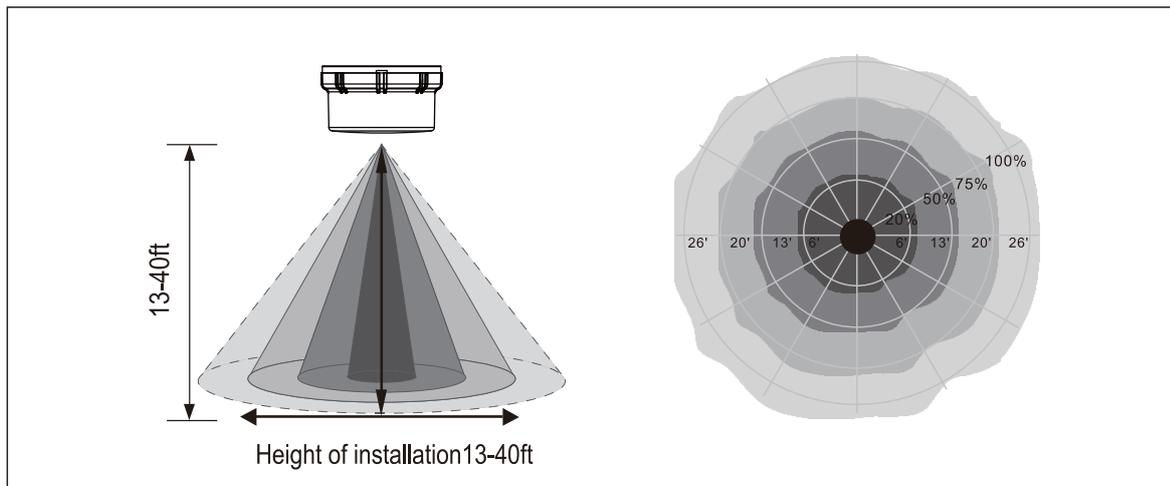

DIMENSIONS AND APPEARANCE

Unit:mm

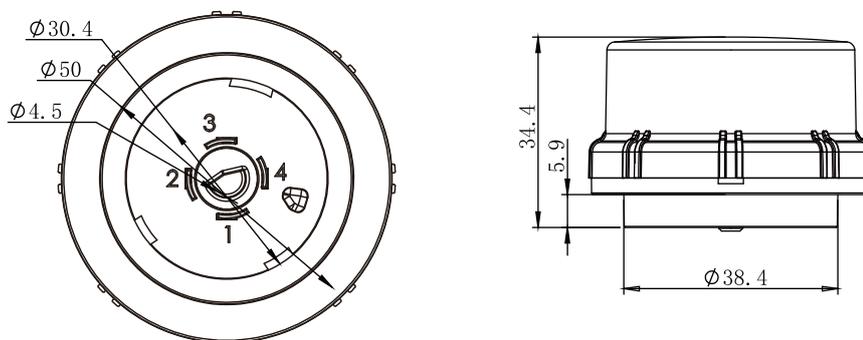

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

