

QC-P4-P-1014D-PC-LB-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

10-14V 0-10V Fixture-Integrated Bluetooth PIR Sensor



Bluetooth®

The QC-P4-P-1014D-PC-LB-BT is passive infrared occupancy bi-level sensor, as a fixture sensor mounts in indoor light fixture and provides daylight harvesting control. It works by 10-14Vdc power, and controls 0-10VDC LED drivers or dimming ballasts, All control parameters are adjustable via a wireless configuration tool capable of storing. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	12ft Max.
Detection angle	360°
Operating temperature	-20°C~60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

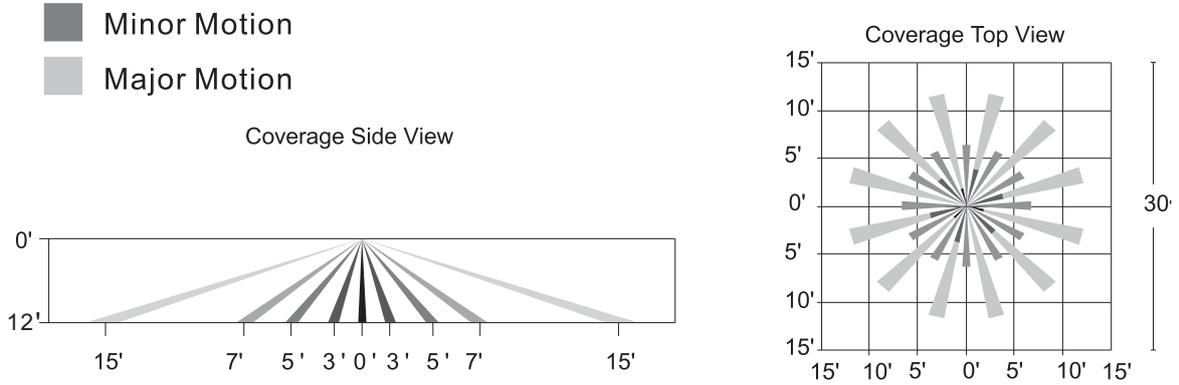

DIMENSIONS AND APPEARANCE

Unit:mm

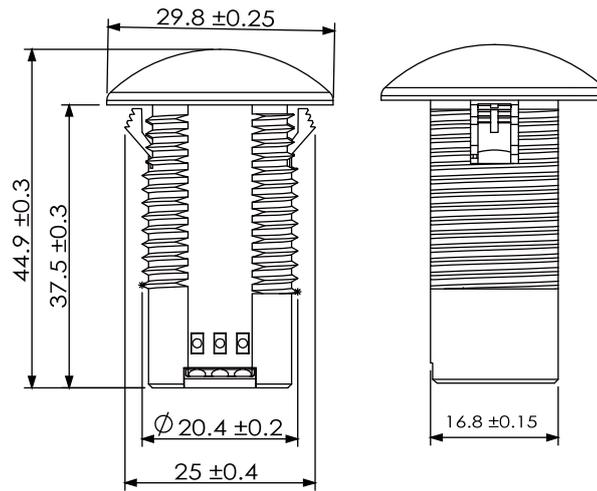

WIRING DIAGRAM

