

GT-N1-USB-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

Bluetooth Dimmer Wall Switch

Bluetooth Mesh in SenseWave

The GT-N1-USB-BT energy monitoring dongle is for collecting energy consumption data in order to generate energy report. ETC dongle also has RTC (Real Time Clock) Function. The GT-001-GE is a Real Time Clock for time syncing for all devices in one Zone.



Bluetooth®



TECHNICAL SPECIFICATIONS


Input Voltage	USB 5V
Input Current	1A Max
Bluetooth Transmit	100ft Max.
Radio Frequency	2.4GHz ± 5MHz
Bluetooth Version	5.0 Housing
Warranty	5years
Operating Temperature	-30°C to 55°C, -22°F to 131°F
Storage Temperature	-30°C to 85°C, -22°F to 185°F
IP rating	IP20



PRODUCT OUTLINE

Press and hold the "S1" and "S3" button for 5 seconds until the green light starts to blink . You can scan and add Gateway by APP.

Press and hold the " S1" and "S2" button for 5 seconds . You can scan and add Timer by APP.

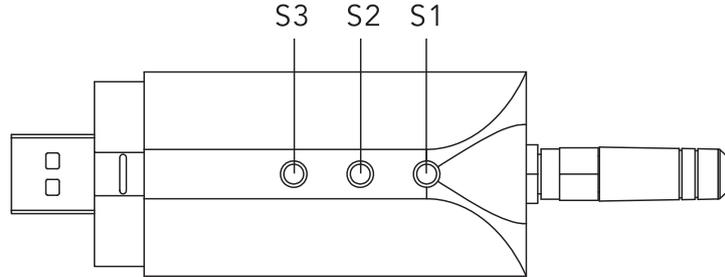

DIMENSIONS AND APPEARANCE

Unit:mm

