

QC-P6-P-1014D-PC-LB-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

10-14V 0-10V Fixture-Integrated Bluetooth PIR Sensor

The QC-P6-P-1014D-PC-LB-BT uses PIR motion detector architecture and bluetooth technology for improved detection coverage applications. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.



Bluetooth®

Download on the
App Store



google play




TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	12ft Max.
Detection angle	360°
Operating temperature	-20°C~60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

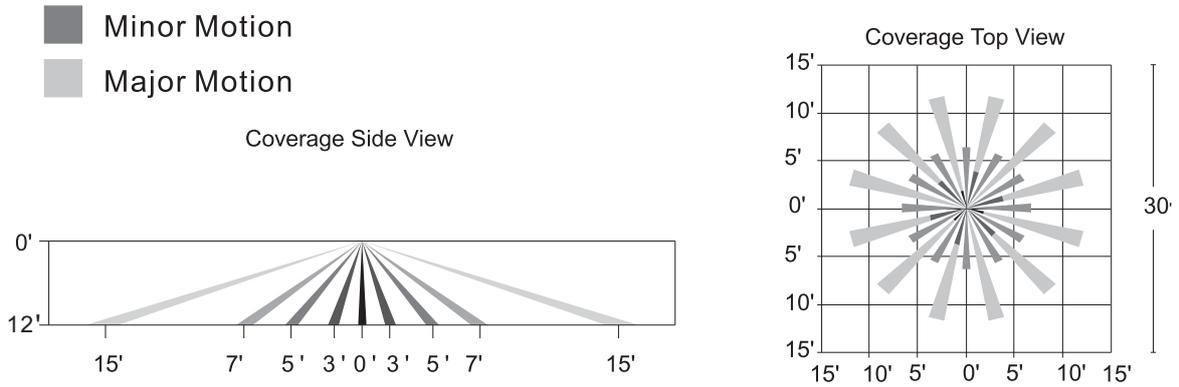

DIMENSIONS AND APPEARANCE

Unit:mm

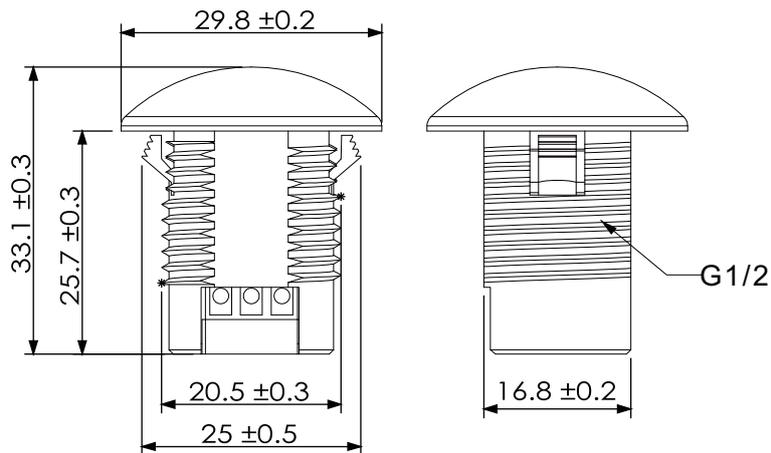

WIRING DIAGRAM

