

3P-K7-TK-CON-1224D-65-LP-BT

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

Longer 3PIN DC Node with Time Keeper Function

3P-K7-TK-CON-1224D-65-LP-BT features an integrated Range Extender to be used for maintaining mesh quality across long ANT-5-4H-CON-BLE-GE-TM features an integrated Range Extender to be used for maintaining mesh quality across long Bluetooth® mesh system.

It features a battery backup unit to provide continuous time operation during power outages. The battery is maintained by the integrated Charge Keeper and maintains master timing for up to 24 hours.

Plug in & play design, low voltage connector.



Bluetooth®

Download on the
App Store



google play




TECHNICAL DATA

| | |
|-----------------------|---------------------------------|
| Input Power | 12-24VDC, >50mA |
| Control Output | 0-10V, max 25mA sinking current |
| HF System | 5.8GHz±75MHz |
| Transmission power | <0.2mW |
| Mounting height | 40ft(12m) Max. |
| Detection angle | 360° |
| Operating temperature | -40°F ~ +158°F (-40°C ~ +70°C) |
| IP rating | 65 |
| Max Bluetooth Range | 500ft(150m) |
| Warranty | 5years |



DIMENSIONS AND APPEARANCE

Unit:mm

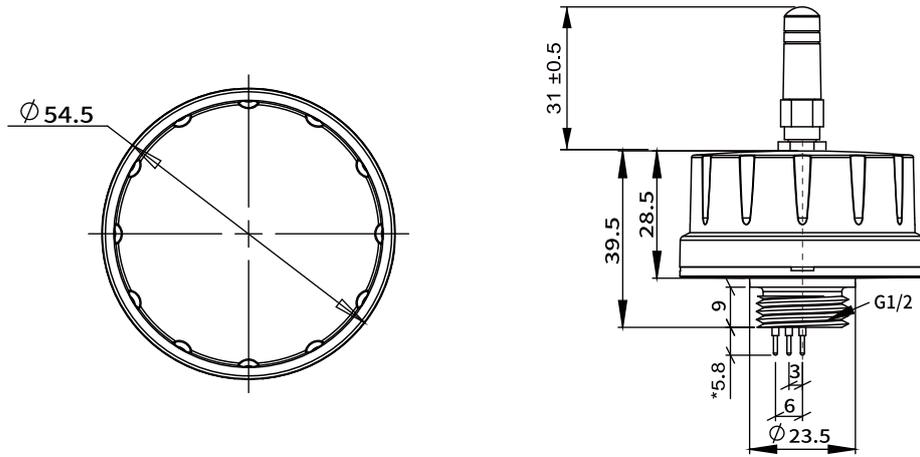

WIRING DIAGRAM

