

3P-K8-TK-CON-1224D-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

3PIN Receptacle DC Node with Time Keeper Function

3P-K8-TK-CON-1224D-65-BT features an integrated Range Extender to be used for maintaining mesh quality across long ANT-5-4R-CON-BLE-GE-TM features an integrated Range Extender to be used for maintaining mesh quality across long Bluetooth®mesh system.

It features a battery backup unit to provide continuous time operation during power outages. The battery is maintained by the integrated Charge Keeper and maintains master timing for up to 24 hours.

Plug in & play design, low voltage connector, match with with Sharkward SS-3P-65-R.



Bluetooth®

Download on the App Store



google play




TECHNICAL DATA

Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°F ~ +158°F (-40°C ~ +70°C)
IP rating	65
Max Bluetooth Range	500ft(150m)
Warranty	5years



DIMENSIONS AND APPEARANCE

Unit:mm

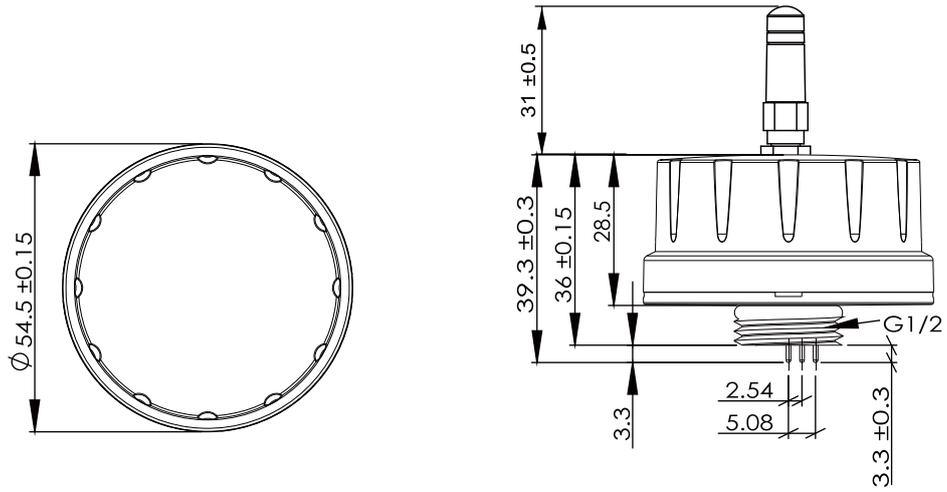

WIRING DIAGRAM

