

AJ25-F2-CON-1224D-65-BT

0-10V Wireless Fixture Controller Bluetooth Mesh in Silvair



AJ25-F2-CON-1224D-65-BT allows for 0-10v dimming, and is integrated with the bluetooth system.

It utilizes a Bluetooth® low energy (BLE) mesh network. Dim levels and schedules can be set through SenseWave iOS app.

OVERVIEW

- Bluetooth® SIG mesh.
- High-End Trim, Zoning, Continuous Bi-level Dimming.
- LED Motion indicator.
- This device can be powered by 12V auxiliary power from dim-to-off LED driver for ease of setup and operation.
- It is suitable for a variety of indoor and outdoor applications. It is IP 65 rated.



Bluetooth®

Download on the App Store



google play




FEATURES & SPECIFICATIONS

Motion Sensor	Microwave sensor
Input Power	12-24 VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C~70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years



DIMENSIONS AND APPEARANCE

Unit:mm

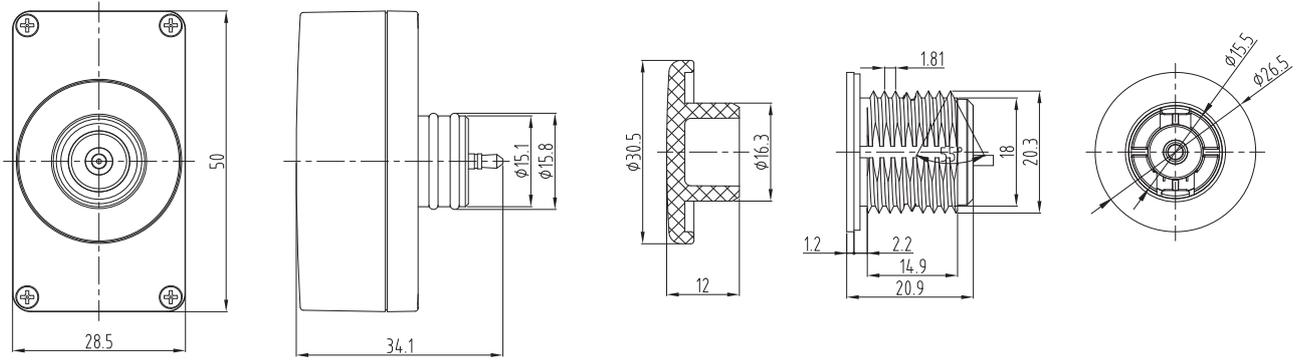

WIRING DIAGRAM

