

QC-P3-P-1024D-PC-DALI



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 10-14V DALI BLE Snap in PIR Sensor

The QC-P3-P-1024D-PC-DALI uses PIR motion detector architecture and bluetooth to DALI technology for improved detection coverage applications.

Plug in & play design, low voltage with Quick connector.



Bluetooth®




## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Powered by	DALI BUS
Control Output	DALI
Mounting height	12ft(4m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years



## SENSOR COVERAGE

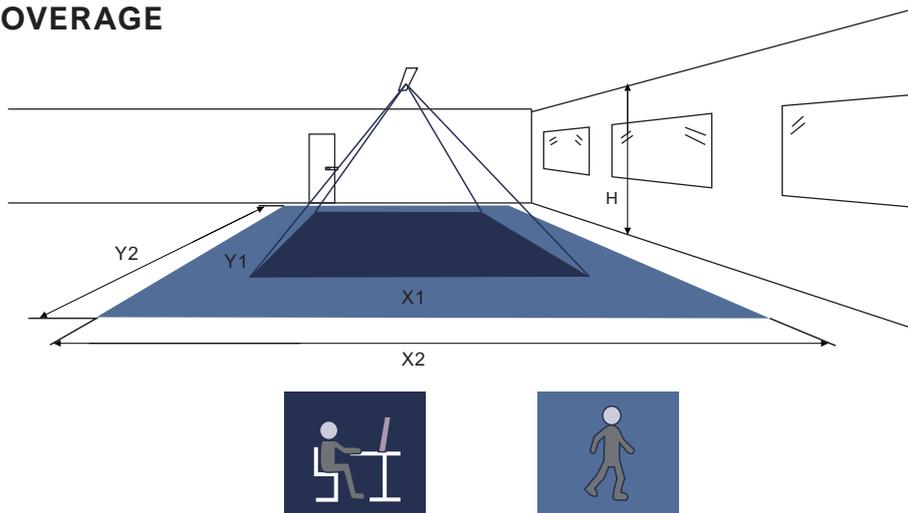


Height	Minor Movement		Major Movement	
H	Y1	X1	Y2	X2
8'/2.4m	10'/2.9m	9'/2.7m	15'/4.5m	10'/2.9m
10'/3m	12'/3.6m	11'/3.4m	18'/5.4m	12'/3.6m

Note: Longer dimension of detection area (Y1, Y2) is parallel to longer dimension.

## DIMENSIONS AND APPEARANCE

Unit:mm

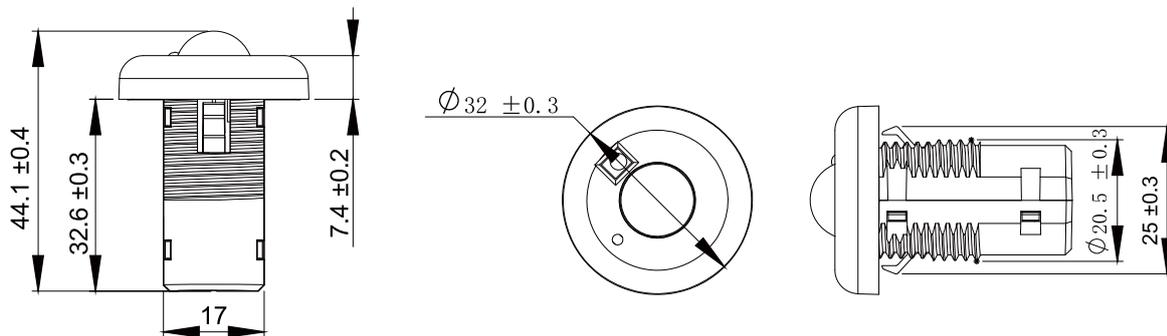

## WIRING DIAGRAM

