

FI-B16-P-1024D-PC-DALI



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

10-14V DALI BLE Fixture-Integrated PIR Sensor

The FI-B16-P-1024D-PC-DALI uses PIR motion detector architecture and bluetooth to DALI technology for improved detection coverage applications.

Low voltage Zhaga Book 20 Quick connector.



Bluetooth®



TECHNICAL DATA


Motion Sensor	Passive infrared sensor
Input Power	12-24VDC
Powered by	DALI BUS
Control Output	DALI
Mounting height	13ft(4m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

- Minor Motion
- Major Motion

Coverage Side View

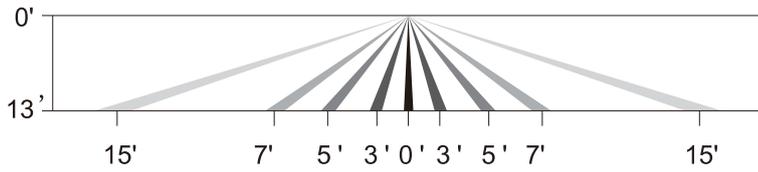


Coverage Top View

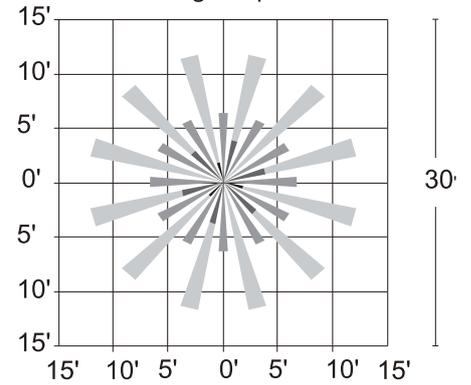


DIMENSIONS AND APPEARANCE

Unit:mm

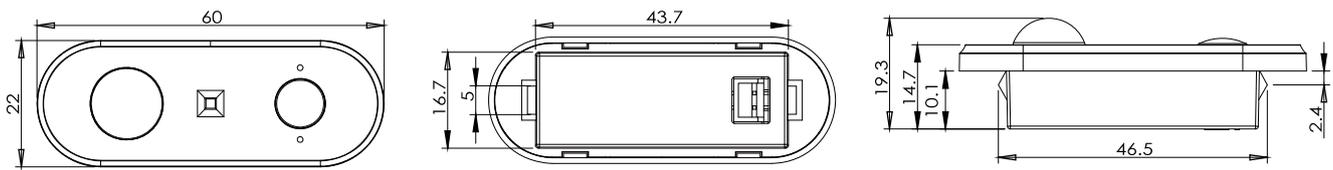

WIRING DIAGRAM

Working with DALI D4i Driver(Integrated DALI BUS power supply)

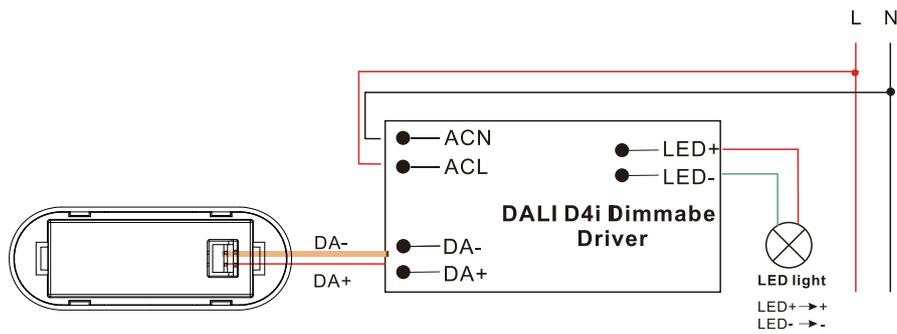

Working with DALI System (DALI BUS power supply)

