

WS-E1-1P-P-120277D-BT



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 120-277V Wall Mounted PIR Bluetooth Motion Sensor



Bluetooth®

The WS-E1-1P-P-120277D-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage applications. It utilizes a Bluetooth® Low Energy (BLE) mesh network.

Wall mounted. Can be mounted in any standard Wall Box. Max Range 30ft@ 4ft mounting height (9m@1.2m mounting height).





## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	120~277VAC 50/60Hz Standard ballast - 300W@120V 600W@277V Electronic Ballast/LED - 300W@120V 600W@277V Tungsten/Incandescent - 600W@120V 1200W@277V
Max Output:	Motor - 1/2hp@120V
Detection angle	180°
Operating temperature	32 to 104 °F (0 to 40 °C)
Max Bluetooth Range	100ft(30m)
Warranty	5years




## SENSOR COVERAGE

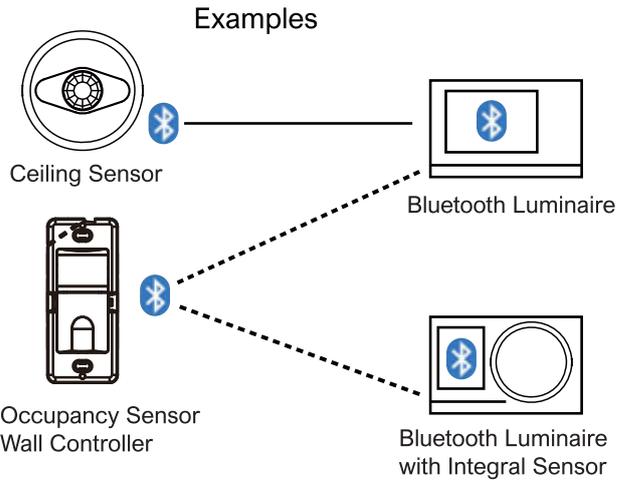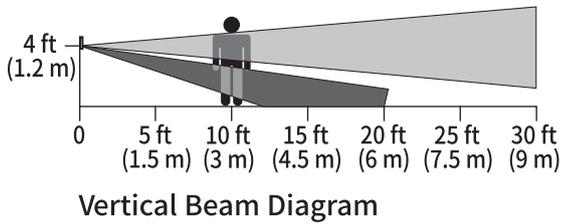

## DIMENSIONS AND APPEARANCE

Unit:mm

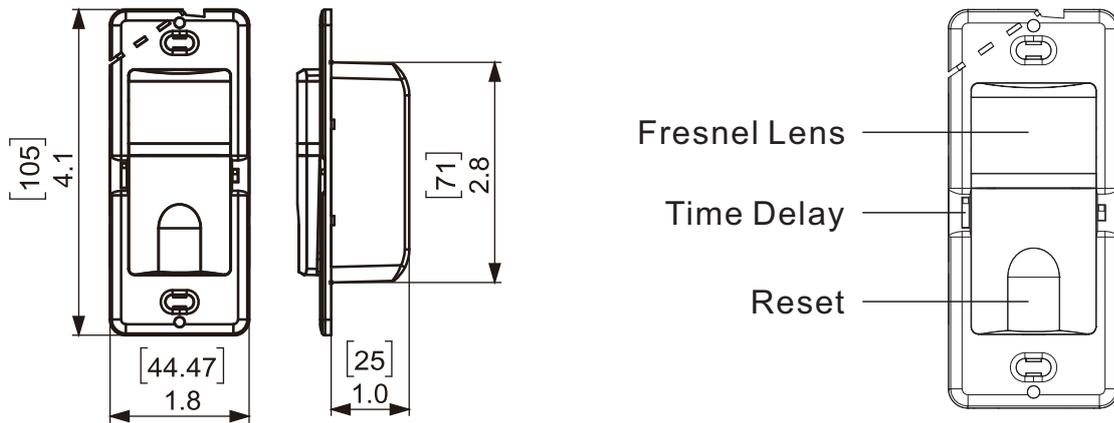

## WIRING DIAGRAM

