

AJ-H6-MW-1224D-PC-HB-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V DC 3.5 PIN Plug and Play

Bluetooth Microwave Sensor

AJ-H6-MW-1224D-PC-HB-65-BT uses microwave motion detector architecture technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Plug in & play design, low voltage connector, match with audio jack SS-AJ-65-35-R.



Bluetooth®




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C ~ +70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years





SENSOR COVERAGE

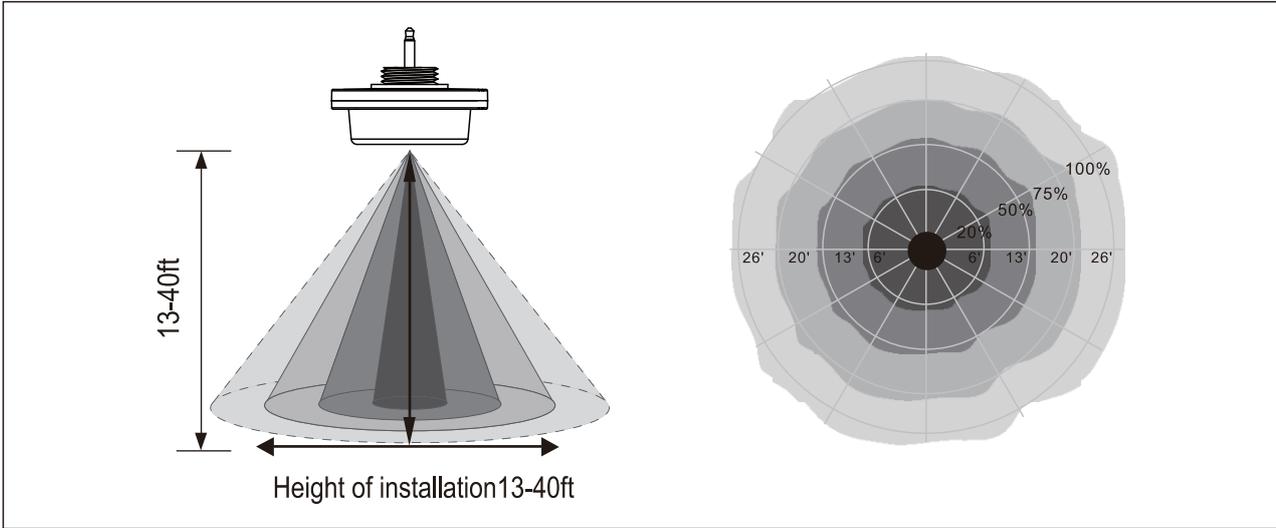


DIMENSIONS AND APPEARANCE

Unit:mm



AJ-H6-MW-1224D-PC-HB-65-BT(receptacle)

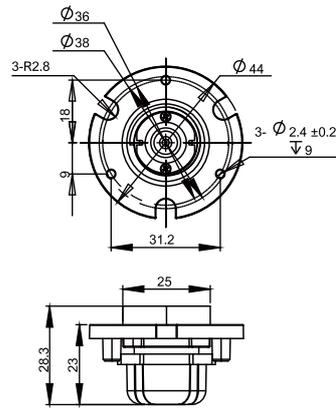

SS-AJ-65-35-R (receptacle)

WIRING DIAGRAM

