


FI-B15-P-1014D-PC-LB-BT



FCC ID: 2AVMOGE01  
ETL  
cUL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 10-14VDC Bluetooth Passive Infrared sensor

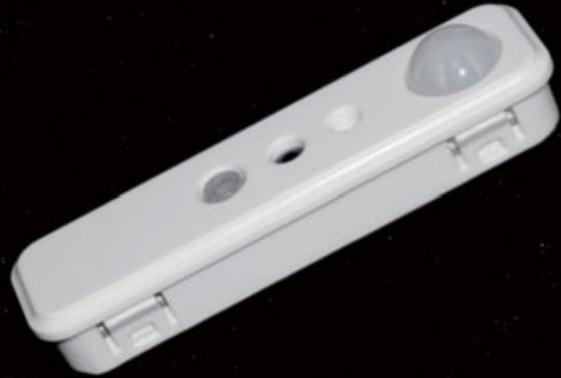

Bluetooth®

The FI-B15-P-1014D-PC-LB-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.




## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 30mA sinking current
Mounting height	12ft(4m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
Max Bluetooth Range	100ft(30m)
Warranty	5years




## SENSOR COVERAGE

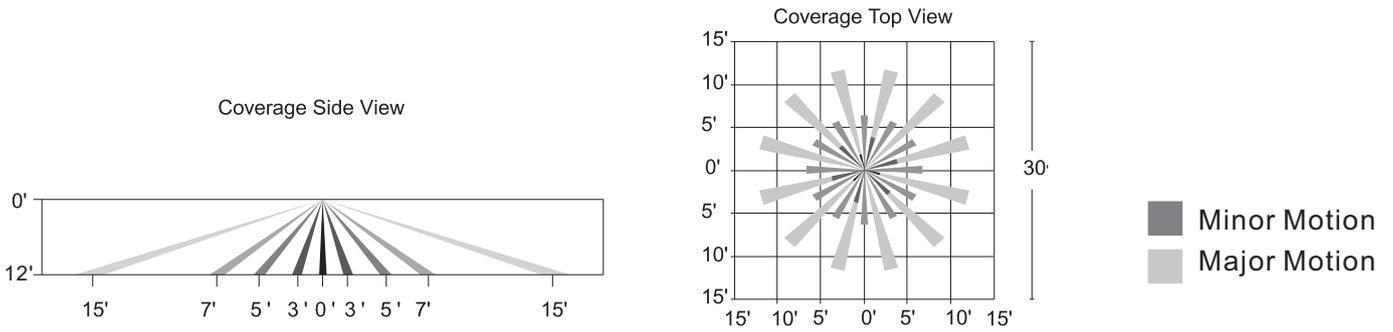

## DIMENSIONS AND APPEARANCE

Unit:mm

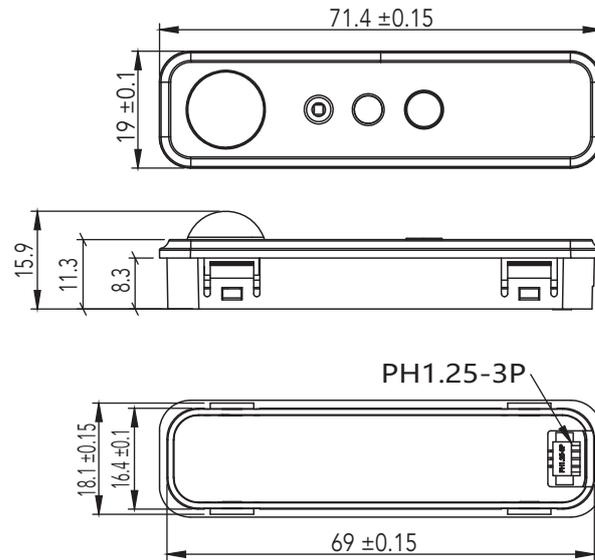

## WIRING DIAGRAM

