

FI-B18-P-1014D-PC-LB-  
MAG-BT



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## DC 0-10V Dimming PIR Bluetooth Sensor



Bluetooth®

FI-B18-P-1014D-PC-LB-MAG-BT uses PIR motion detector architecture technology for improved detection coverage for low bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

PIR sensor with clips, no need to use screws to fix.




## TECHNICAL DATA

Motion Sensor	PIR sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Transmission power	<0.2mW
Mounting height	12ft(4m) Max
Detection angle	360°
Operating temperature	-20°C~60°C
IP rating	20
Max Bluetooth Range	100ft(30m)
Warranty	5years




## SENSOR COVERAGE

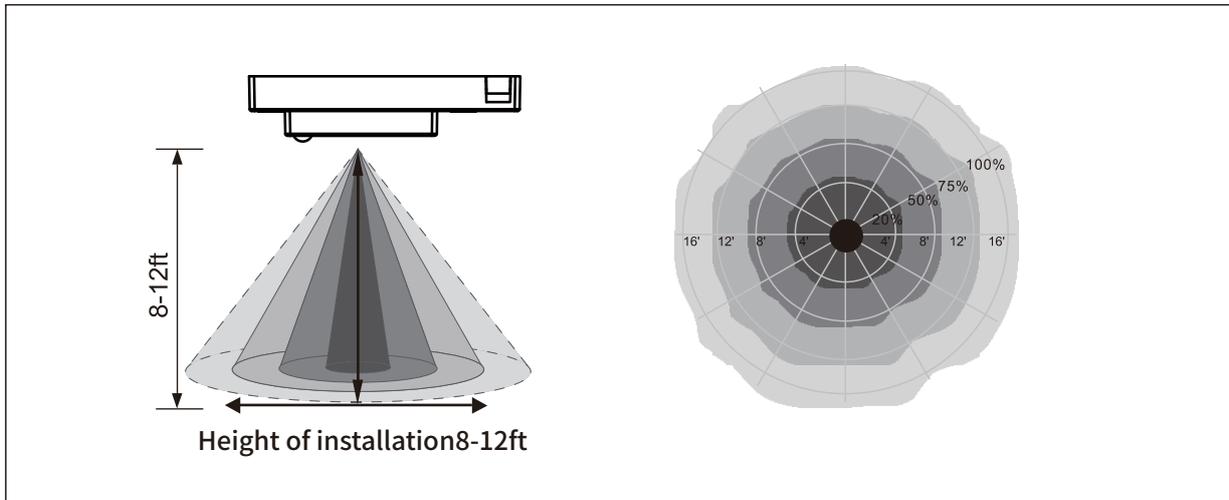

## DIMENSIONS AND APPEARANCE

Unit:mm

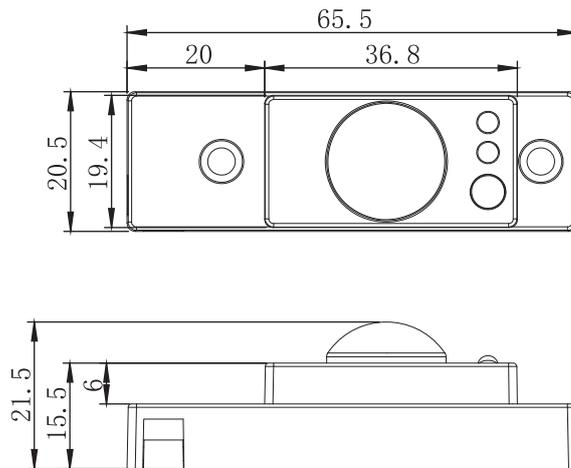

## WIRING DIAGRAM

