

■ FM-A11-MW-1014D-PC-LB-
■ MAG-BT



FCC ID: 2AVMOGE01
ETL
cUL
DLC
Bluetooth®
Declaration ID: D062134

10-14V Bluetooth Microwave Sensor



Bluetooth®

The FM-A11-MW-1014D-PC-LB-MAG-BT uses microwave motion detector architecture technology for improved detection coverage for low bay applications. It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	10-14VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	12ft(4m) Max.
Detection angle	360°
Operating temperature	-40°C~70°C
IP rating	20
Max Bluetooth Range	100ft(30m)
Warranty	5years




SENSOR COVERAGE

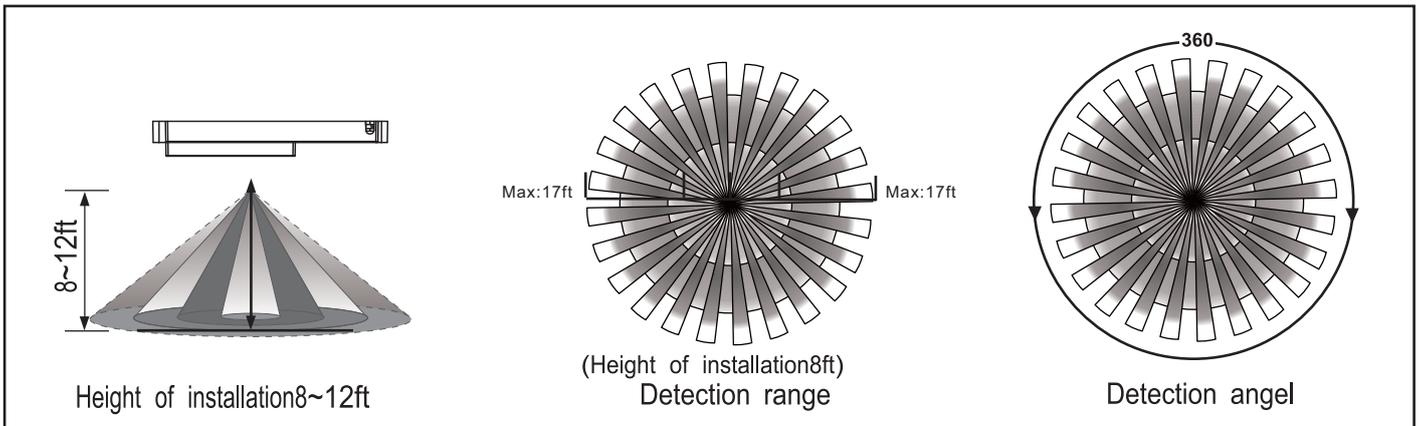

DIMENSIONS AND APPEARANCE

Unit:mm

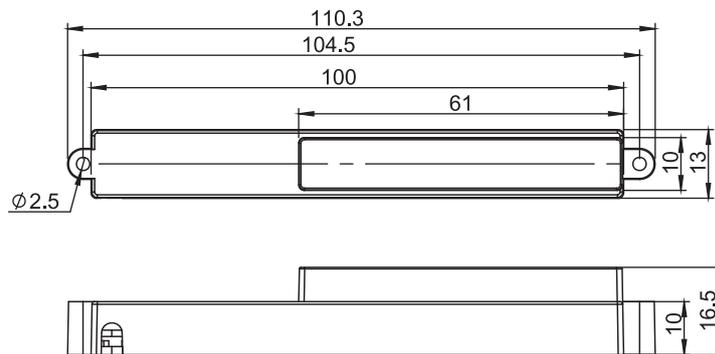

WIRING DIAGRAM

