

ZT10-J3-TK-CON-1224D-65-BT

FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

Zhaga & Z10 Connector DC Node with Time Keeper Function

ZT10-J3-TK-CON-1224D-65-BT features an integrated Range Extender to be used for maintaining mesh quality across long ANT-5-ZT10-CON-BLE-GE-TM features an integrated Range Extender to be used for maintaining mesh quality across long Bluetooth® mesh system.

It features a battery backup unit to provide continuous time operation during power outages. The battery is maintained by the integrated Charge Keeper and maintains master timing for up to 24 hours.

Each unit is assembled with plug and play base. No need to add other extra time keeper. 3.5mm Audio Jack DC Fixture Controller

Plug in & play design, low voltage connector, match with all Zhaga Book 18 base and Z10 base.



Bluetooth®

Download on the App Store



google play





TECHNICAL DATA

Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°F ~ +158°F (-40°C ~ +70°C)
IP rating	65
Max Bluetooth Range	500ft(150m)
Warranty	5years



DIMENSIONS AND APPEARANCE

Unit:mm

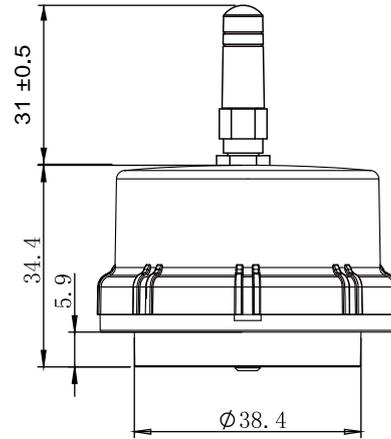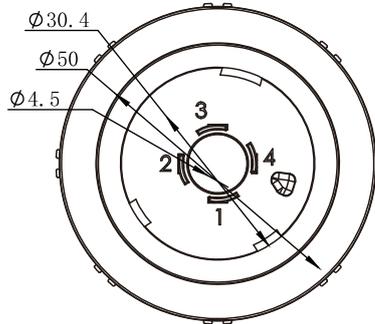

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

