


Z18-G1-CON-1224D-65-BT



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V 0-10V Wireless Fixture Controller



Bluetooth®

Z18-G1-CON-1224D-65-BT uses microwave motion detector architecture technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

ZHAGA BOOK 18 appearance design, low voltage connector, match with ZHAGA BOOK 18 BASE SS-Z18-KO-SW.

Download on the App Store



google play




TECHNICAL DATA

| | |
|-----------------------|---------------------------------|
| Input Power | 12-24VDC, >50mA |
| Control Output | 0-10V, max 25mA sinking current |
| Operating temperature | -40°F ~ +158°F (-40°C ~ +70°C) |
| IP rating | 65 |
| Wireless Standards | 5.0 Bluetooth Mesh |
| Max Bluetooth Range | 200ft(60m) |
| Warranty | 5years |



DIMENSIONS AND APPEARANCE

Unit:mm

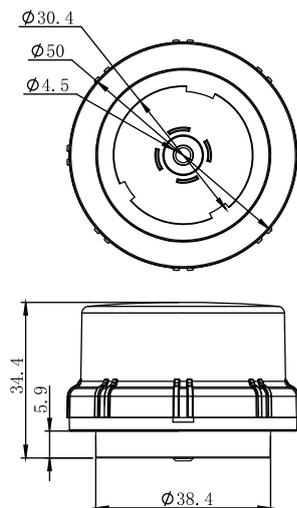

WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

