


Z18-G1-P-1024D-PC-DALI



FCC
ETL
DLC
Bluetooth®
Declaration ID: D062134

12-24V DALI BLE ZHAGA BOOK 18 Bluetooth Microwave Sensor

Z18-G1-P-1024D-PC-DALI uses microwave motion detector architecture and DALI technology for improved detection coverage for high bay applications.

It utilizes a Bluetooth® Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

ZHAGA BOOK 18 appearance design, low voltage connector, match with ZHAGA BOOK 18 BASE SS-Z18-KO-SW.



Bluetooth®




TECHNICAL DATA

Motion Sensor	Microwave sensor
Input Power	12-24VDC, >50mA
Powered by	DALI BUS
Control Output	DALI
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-40°C~70°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Connection method	Zhaga Book 18
Warranty	5years




SENSOR COVERAGE

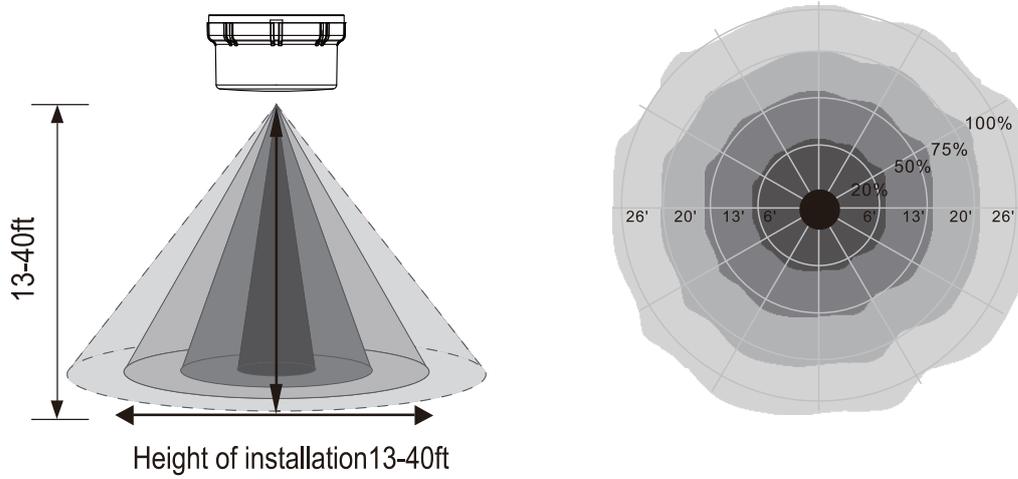


DIMENSIONS AND APPEARANCE

Unit:mm

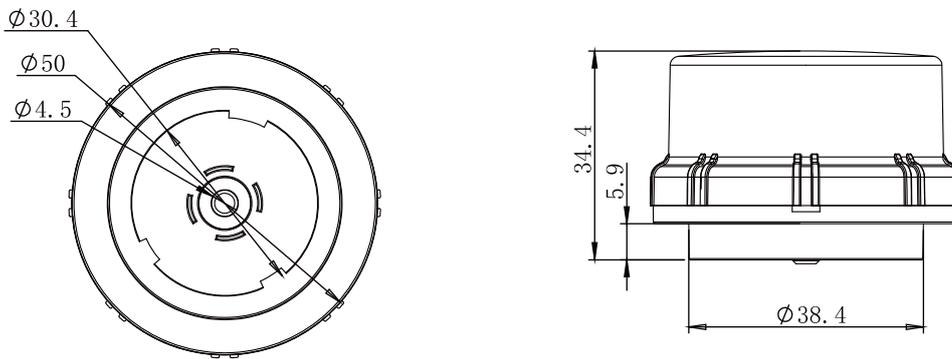

WIRING DIAGRAM

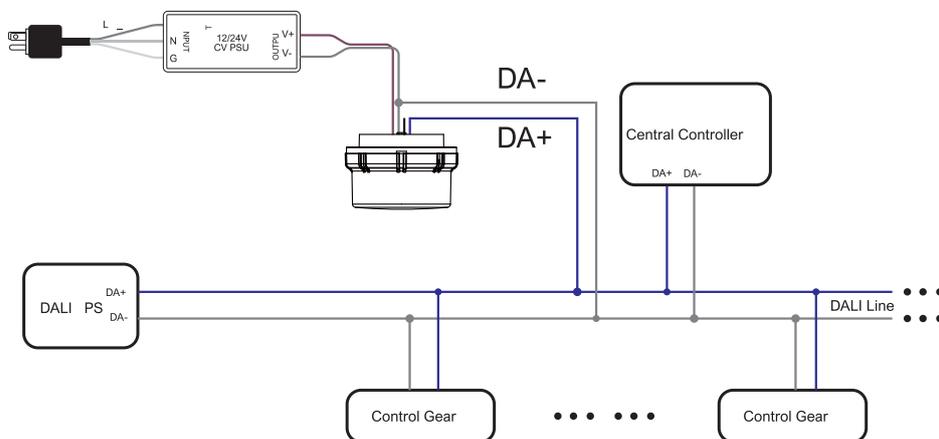

Note: please make sure the polarity of DALI signal of the sensor is correctly connected