

Z10-O2-P-1224D-PC-HB-65-BT



FCC  
ETL  
DLC  
Bluetooth®  
Declaration ID: D062134

## 12-24V 0-10V DC Fixture-Integrated Bluetooth PIR Sensor



Bluetooth®

Z10-O2-P-1224D-PC-HB-65-BT uses PIR motion detector architecture and passive infrared (PIR) technology for improved detection coverage for high bay applications. It utilizes a Bluetooth Low Energy (BLE) mesh network. Dimming levels and schedules can be set through SenseWave app.

Plug in & play design, low voltage connector, match with Z10 BASE SS-Z10-KO-SW.




## TECHNICAL DATA

Motion Sensor	Passive infrared sensor
Input Power	12-24VDC, >50mA
Control Output	0-10V, max 25mA sinking current
Mounting height	40ft(12m) Max.
Detection angle	360°
Operating temperature	-20°C-60°C
IP rating	65
Max Bluetooth Range	200ft(60m)
Warranty	5years





## SENSOR COVERAGE

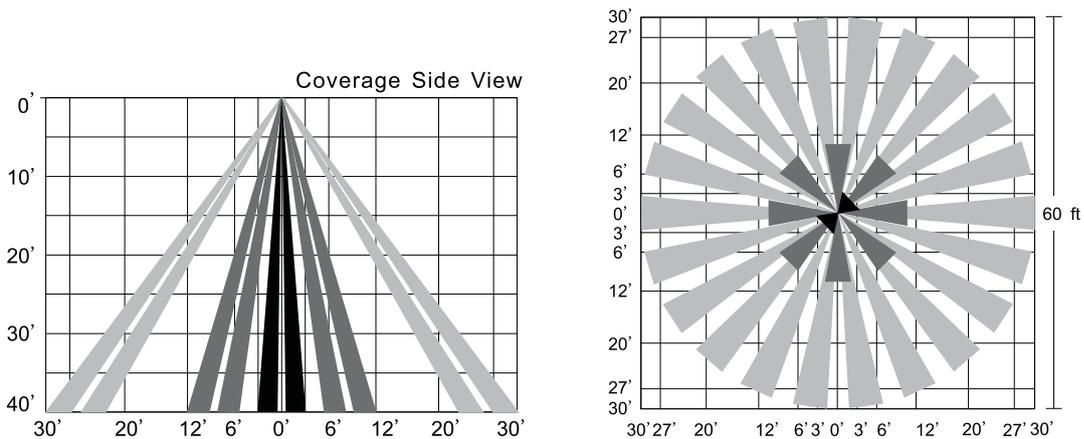

## DIMENSIONS AND APPEARANCE

Unit:mm

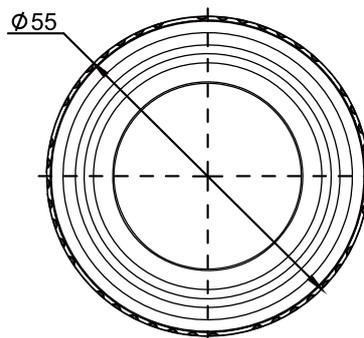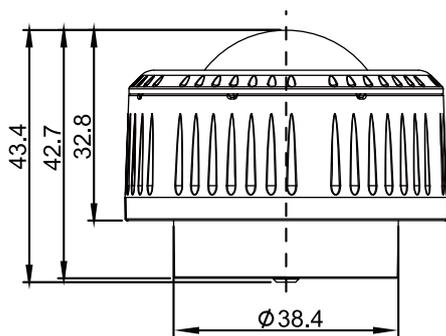

## WIRING DIAGRAM

- Port 1 : 12-24Vdc
- Port 2 : GND/DIM -
- Port 3 : DIM +
- Port 4 : NC

